



Ê

## <sup>apex</sup> ULTIMA



## BEIGES, BROWNS & GREY



# YELLOWS, ORANGES & RED



## PURPLES, BLUES & GREENS



# COLOUR COMBINATIONS



## COLOUR COMBINATIONS



## COLOUR COMBINATIONS AS SEEN ON THE COVER



BRILLIANT WHITE

## APEX FLOOR GUARD



Apex Floor Guard is also available in the following direct shades: White 0908, Golden Yellow 3300 & Black 0801.



An undulated exterior wall can spoil the look of your home, while cracks can lead to water seepage and dampness. So what's the best way to get around these problems? It's simple. Apply Apex Createx texture over it. A tough layer that not only forms a protective barrier but also offers you a range of beautiful texture options to add oomph to the façade of your home.



Scratch Texture



**Roller Finish** 

### **ADVANTAGES OF CREATEX**



#### EXTERIOR AND INTERIOR


Superior formulation making it durable for exteriors and also usable on interior walls.



#### DURA STICK FORMULA

Imparts superior adhesion on all types of surfaces.








**COVERS CRACKS** 



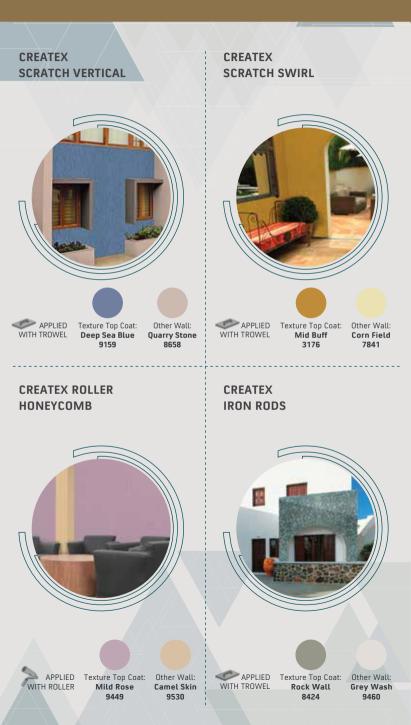

### APEX FLOOR GUARD



### PATTERNS









Roller

Conventional spray

### SUBSTRATES:

- Cement Blocks
- Cement Tiles
- Concrete Floors
- Stamped Concrete Floors

# ULTIMA PROTEK

Asian Paints brings to your wall the ultimate combination of unmatched protection with amazing beauy. Apex Ultima Protek Basecoat provides the durability to the surface through the Fibre Technology and the Apex Ultima Protek Topcoat with its Lamination guard shields the house from all kind of vagaries of the weather.



\*TEFLON™ is a trademark of The Chemours Company FC, LLC used under sublicense by Asian Paints Limited.



\*Conditions Apply – Please refer to the Asian Paints Apex Ultima Protek Product & Warranty guide for conditions and information on the warranty, or visit www.asianpaints.com.

# **DIRECTIONS FOR USE**

#### Surface Preparation

Ensure that the surface to be painted is free from loose paint, dust, grease and algae, by vigorous wire brushing, cleaning with water.

#### Surface Smoothening/Crack Filling



Asian Paints SmartCare Crack Seal can bridge cracks 3mm in width, by filling compound into both interior and exterior masonry surfaces.

### Application



Use Exterior Wall Primer with Ultima Protek Topcoat Before application of topcoat for fresh and re-painting surfaces apply a coat of Asian Paints Trucare Exterior Wall Primer.

### For waterproofing requirement, use Ultima Protek Basecoat with Ultima Protek Topcoat



Fresh Surfaces: Apply a self-priming coat of Protek Basecoat (dilute 1 ltr of Basecoat with 300 ml of water) with a spreading rate of 75 - 80 sq.ft / ltr. After drying for 4 - 6 hours apply another coat of Protek Basecoat without dilution with a spreading rate of 75 - 80 sq.ft / ltr. Repainting: On surfaces previously painted, apply one coat of Protek Basecoat without dilution at a spreading rate of 35 - 40 sq.ft / ltr and allow to dry for 4 - 6 hours.



#### Usage of Ultima Protek Topcoat

Apply 2 - 3 coats of Protek Topcoat (dilute 1 ltr of Topcoat with maximum 400 ml of water) with a spreading rate of approximately 60 - 65 sq.ft / ltr for 2 coats. A gap of 4 - 6 hours should be given between two coats.

### Asian Paints Ezypainting Service

Painting your home is exciting. With Asian Paints Ezy Painting service, re-imagine your house as a huge canvas that you can choose to paint and make it look the way you wish. But choosing the correct colours, products, and painters can be a huge task. That's where we come in with our aim to make painting a great experience!

# Our Supervisors will take care of all your wall painting, wood finishing and waterproofing needs.

- Expert Supervision
- Wallpapers and Textured Finishes
- Wood Solution
- Waterproofing Solutions

For Professional Painting Services Call **18002095678** 



For more information log on to **www.asianpaints.com,** or call us at **1800-209-5678**.